

# CHALCO ELEVEN LTD

“CHALCO HOUSE”

MARYCULTER

ABERDEEN

AB12 5GQ

TEL (44)-(0)-1224 733321


E-Mail: [ce@chalco.co.uk](mailto:ce@chalco.co.uk)

FAX (44)-(0)-1224 733685

[www.chalco.co.uk](http://www.chalco.co.uk)



## SUBSEA LIGHT CE-24/20LED

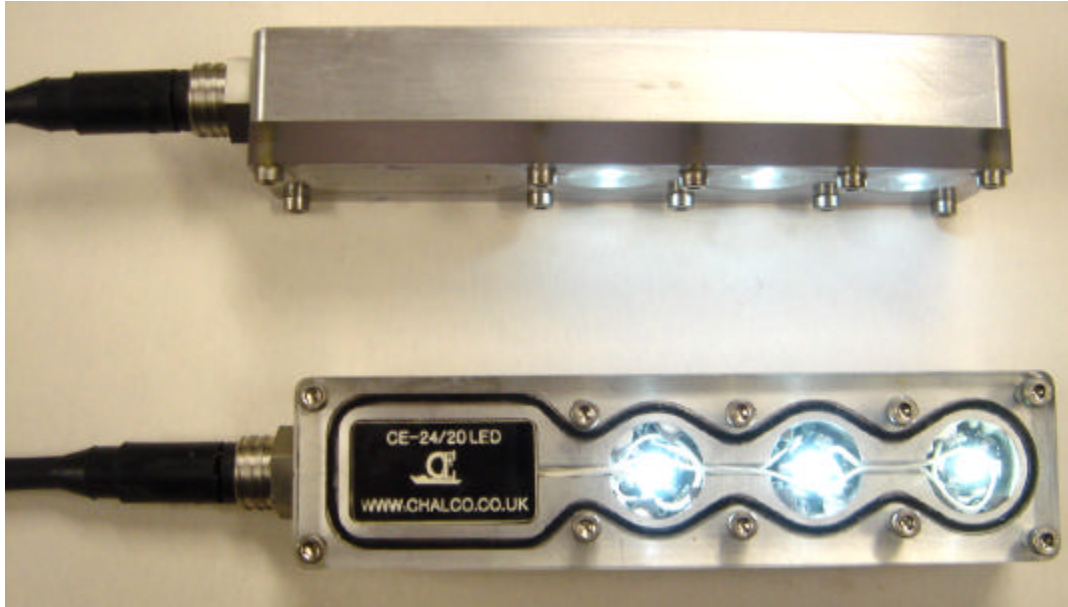

The Subsea Light CE-24/20LED is a totally solid state which does not incorporate any halogen filaments that heat up and break. This light, once powered, can be illuminated in excess of 50,000 hours and can be knocked, bashed and moved about while illuminated.

The CE-24/20LED is manufactured from Aluminium/Acrylic with a Stainless Steel Subsea Connector and can withstand depths of 1000M plus. It only measures 45mm x 30mm x 180mm excluding the connector and has a 90° wide beam angle which eliminates hot spots and red eye when used at close distance inspection via the CC720ZML HyperDigital Subsea Camera. It allows the user to light up a very large area in low visibility subsea. The light is evenly distributed rather than a concentrated beam.

The Light can be used with any Chalco Eleven Camera Controllers. The Light incorporates a subsea pluggable connector and operates from multiple supplies that can be specified (normal use 24V DC). The Light can be fitted in to Air Chamber, Saturation Chamber or Bell. Although it creates a cool light, the back of the Light can get hot, therefore, must be mounted directly on to the Bulkhead. However, if it is used on an ROV or A Frame, the Light will regulate its temperature when it is placed in the water.

### Features

<b>Type:</b>	Subsea, Air / Saturation Chamber or Bell Light
<b>Dimensions:</b>	45mm x 30mm x 180mm
<b>Weight:</b>	520gm in Air
<b>Connector:</b>	2 pin plus guide underwater mateable
<b>Input Voltage:</b>	24V DC
<b>Depth Rating:</b>	1000M MSW
<b>Material:</b>	Aluminium/Acrylic 2 pin Male S/S Connector
<b>Power Output:</b>	35+ Watts 90° Beam